

Code: FLEX-2588

NVR **FLEX-2588** 36 CHANNELS +eSATA

Net: **359.40 EUR** Gross: **359.40 EUR**



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	4 @ 2592 x 1920 px, 8 @ 2048 x 1536 px, 25 @ 1920 x 1080 px, 36 @ 1280 x 960 px, 36 @ 1280 x 720 px, 16 @ 1920 x 1080 px in the same time with: 16 @ 1280 x 960 px
Audio support:	36 Channels
Video outputs:	1 pcs HDMI 1 pcs VGA 1 pcs BNC
Audio inputs:	Audio from cameras
Audio outputs:	1 pcs BNC
Image compression method:	H.264
Maximal total frame rate:	900 fps @ 1280 x 960 px, 900 fps @ 1280 x 720 px, 625 fps @ 1920 x 1080 px, 200 fps @ 2048 x 1536 px, 100 fps @ 2592 x 1920 px
Supported hard drives:	8 x 4 TB SATA + 1 x eSATA
Operation modes:	Firmware V4.0[20140710] : • 4 x Main stream (2592 x 1944) + 4 x Sub stream (960 x 576) + 4 Channels played simultaneously • 8 x Main stream (2048 x 1536) + 8 x Sub stream (960 x 576) + 8 Channels played simultaneously • 16 x Main stream (2048 x 1536) + 16 x Sub stream (960 x 576) + 4 Channels played simultaneously • 20 x Main stream (1920 x 1080) + 20 x Sub stream (960 x 576) + 4 Channels played simultaneously • 25 x Main stream (1920 x 1080) + 25 x Sub stream (960 x 576) + 4 Channels played simultaneously • 16 x Main stream (1920 x 1080) + 16 x Main stream (1280 x 960) + 32 x Sub stream (960 x 576) + 4 Channels played simultaneously • 36 x Main stream (1280 x 960) + 36 x Sub stream (720 x 576) + 8 Channels played simultaneously • 16 x Main stream (1920 x 1080) + 16 x Sub stream (960 x 576) + 4 Channels played simultaneously • 8 x Main stream (1920 x 1080) + 16 x Main stream (1280 x 960) + 24 x Sub stream (960 x 576) + 4 Channels played simultaneously • 32 x Main stream (1280 x 960) + 32 x Sub stream (960 x 576) + 4 Channels played simultaneously
Recording modes:	Manual, Sensor, Motion detection, Schedule

Network protocols:	ONVIF, I8, I9, RTSP
External storage devices backup:	Records backup at .mp4 / .avi format to USB (pendrive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow
Bitrate:	max. 100 Mbps
Network functions:	Live image view, Playback the records, Backup the records
ONVIF:	✓
Mobile phones support:	Port 5053 • Android: Free application MEye • iOS (iPhone): Free application Meye • Windows Phone: Free application Meye Access by a cloud (P2P) • Android: Free application Goolink • iOS (iPhone): Free application Goolink
Alarm inputs / outputs:	16 / 4
PTZ control:	RS-485 - PELCO-D/P
Motion Detection:	22 x 18 motion zones
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	230 V AC
Operation temp:	-10 °C ... 55 °C
Weight:	7.31 kg
Dimensions:	440 x 456 x 98 mm 2 U Rack 19"
Supported languages:	English, Polish
Country of origin:	China
Guarantee:	2 years

PRESENTATION

Front panel:



Rear panel:




In the kit:



OUR TESTS

See the configuration of the APTI series cameras operation modes with the recorders:

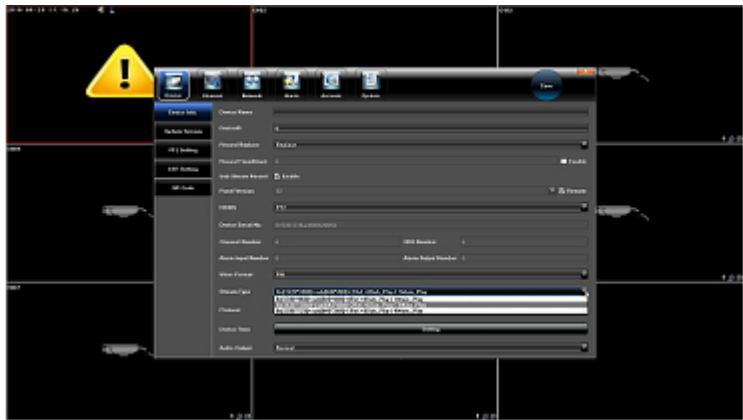

OUR OPINIONS



- DVR records smooth image at good quality with audio for each camera.



- Quite noisy power supply fan.
- To provide the connection from Internet (WAN) to a DVR connected to the LAN, you should forward on router the following ports: 80, 5050, 5051, 5052, 5053.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60